


Universal Car Emulator Programs:

Citroen, Peugeot with CAN – ver 2 (use PIN)3

Program	Use
Citroen, Peugeot with CAN - ver 2 (use PIN)	<ul style="list-style-type: none">• Bosch EDC17C10 GO TO VIDEO

Wiring colour codes

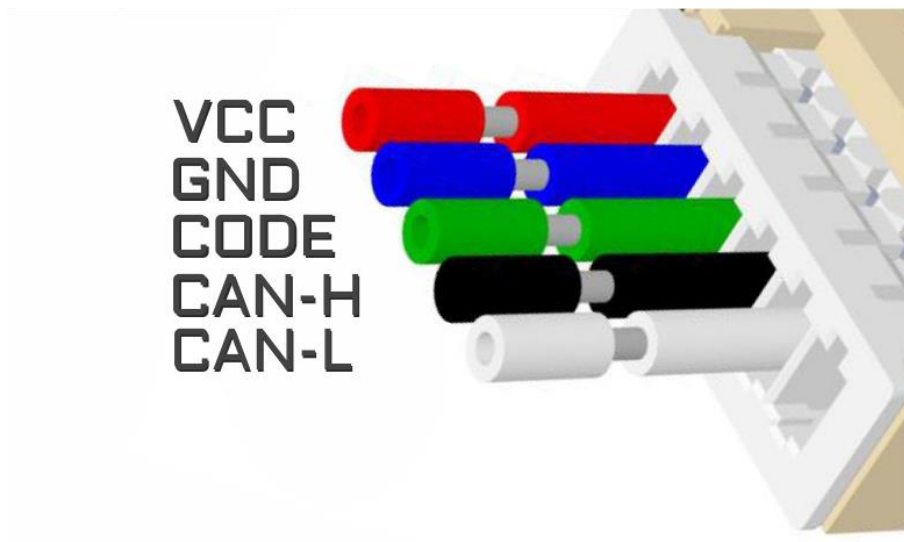


The LED behavior

- no jumpers – diagnostic mode - it flashes every second
 - adjusting to the ECU – flashing 0,1 sec
- after adjusting it lights constantly and blinks every other second

Citroen, Peugeot with CAN – ver 2 (use PIN)

In Universal Emulator solder jumpers J1, J2, J4, J5 and J6

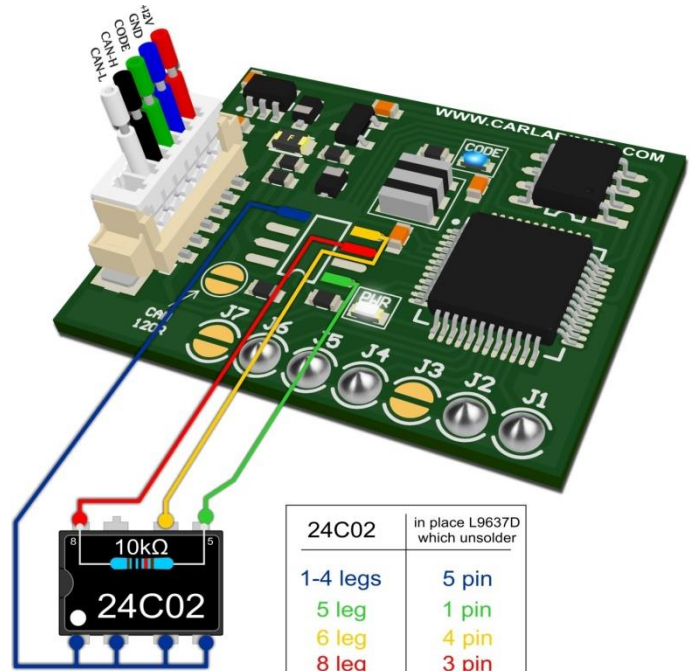

Between 5th and 8th legs of 24C02 memory put 10kΩ resistor

USE

Bosch EDC17C10

*Tested on ECUs:
0 281 017 336*



Click to watch the video

Bosch EDC17C10



- GND** 1/4 pin
- +12V ACC** 1/19 pin
- CAN-L** 1/52 pin
- CAN-H** 1/40 pin

Connecting emulator to ECU

